

# Low Brightness Recessed T5

# T5

## Low Brightness Troffers

A low-profile, high output, louvred luminaire for recessed and surface applications. It features the highly reflective MIRO® material in its louvre construction and a white polyester powdercoated body.

T5 lamp sources and electronic control gear are utilised for optimum performance.

All recessed luminaires include a 1.5m flex and 3-pin flat earth plug as standard.



## Applications


- Schools
- Offices
- Hospitals
- Libraries
- Retail

## Mounting


- T-Bar Recessed
- Plaster Recessed
- Surface Mounted
- Suspended

## Options

- Air Slots
- Dimmable Ballasts

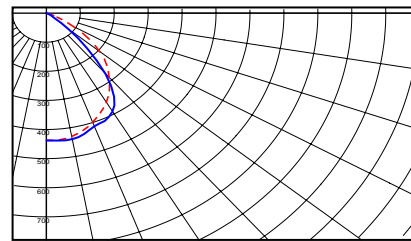

LBGT300281-24M5 1x28wT5 Miro 5  
Test Report LL11892

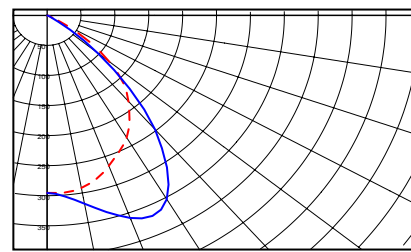

LBGT300282-56SS 2x28wT5 Semi Specular  
Test Report LSA9171.

Note: Details subject to change without notice  
Please contact Australume sales for further information.



# Low Brightness Grid T5

# LBGT

## T-Bar Miro 5 Fixtures


Cat No	Wattage	Mounting	L	W	H
LBGT300141-13SS	1x14w	T-Bar	590	290	60
LBGT300241-13SS	1x24w	T-Bar	590	290	60
LBGT300281-24SS	1x28w	T-Bar	1190	290	60
LBGT300541-24SS	1x54w	T-Bar	1190	290	60
LBGT300142-26SS	2x14w	T-Bar	590	290	60
LBGT300242-26SS	2x24w	T-Bar	590	290	60
LBGT300282-52SS	2x28w	T-Bar	1190	290	60
LBGT300542-52SS	2x54w	T-Bar	1190	290	60
LBGT600143-39SS	3x14w	T-Bar	590	590	60
LBGT600243-39SS	3x24w	T-Bar	590	590	60
LBGT600283-78SS	3x28w	T-Bar	1190	590	60
LBGT600543-78SS	3x54w	T-Bar	1190	590	60
LBGT600144-52SS	4x14w	T-Bar	590	590	60
LBGT600244-52SS	4x24w	T-Bar </tr			




### Notes:

- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.
- Air Slots substitute "AT" for "GT" in Cat No.
- Other Louvre material types and configurations available upon request.

### Dimensional Detail

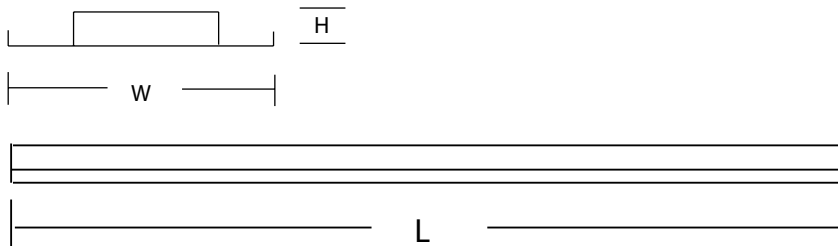

### Louvre Configurations

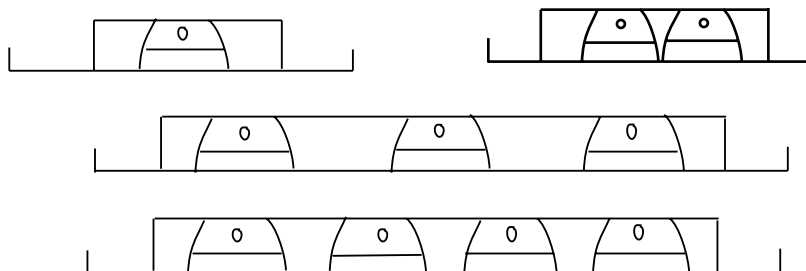

Note: Details subject to change without notice  
Please contact Australume sales for further information.



# Low Brightness Plaster T5

# LBPT

## T-Bar Miro 5 Fixtures


Cat No	Wattage	Mounting	L	W	H
LBPT150141-13SS	1x14w	Plaster	590	150	95
LBPT300241-13SS	1x24w	Plaster	590	150	95
LBPT300281-24SS	1x28w	Plaster	1190	150	95
LBPT300541-24SS	1x54w	Plaster	1190	150	95
LBPT220142-26SS	2x14w	Plaster	590	220	90
LBPT220242-26SS	2x24w	Plaster	590	220	90
LBPT220282-52SS	2x28w	Plaster	1190	220	90
LBPT220542-52SS	2x54w	Plaster	1190	220	90
LBPT600143-39SS	3x14w	Plaster	590	590	60
LBPT600243-39SS	3x24w	Plaster	590	590	60
LBPT600283-78SS	3x28w	Plaster	1190	590	60
LBPT600543-78SS	3x54w	Plaster	1190	590	60
LBPT600144-52SS	4x14w	Plaster	590	590	60
LBPT600244-52SS	4x24w	Plaster	590	590	60
LBPT600284-96SS	4x28w	Plaster	1190	590	60
LBPT600544-96SS	4x54w	Plaster	1190	590	60




### Notes:

- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.

### Dimensional Detail

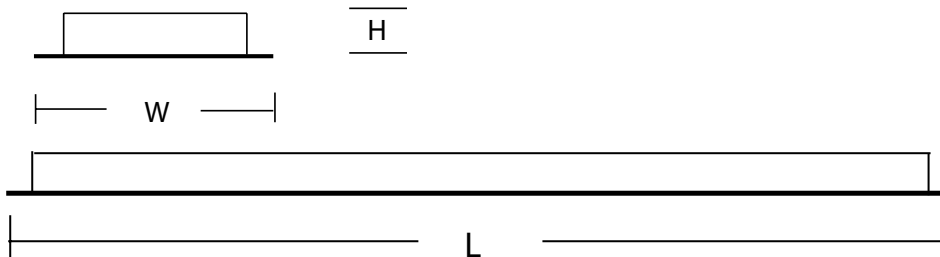

### Louvre Configurations

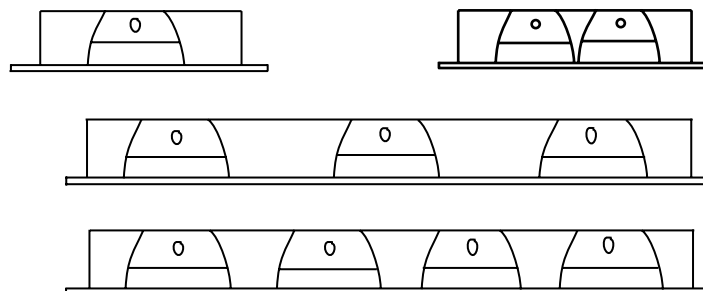

Note: Details subject to change without notice  
Please contact Australume sales for further information.



## Surface Miro 5 Fixtures


Cat No	Wattage	Mounting	L	W	H
LBSM150141-13SS	1x14w	Surface	630	150	90
LBSM150241-13SS	1x24w	Surface	630	150	90
LBSM150281-24SS	1x28w	Surface	1190	150	90
LBSM150541-24SS	1x54w	Surface	1190	150	90
LBSM220142-26SS	2x14w	Surface	590	220	90
LBSM220242-26SS	2x24w	Surface	590	220	90
LBSM220282-52SS	2x28w	Surface	1190	220	90
LBSM220542-52SS	2x54w	Surface	1190	220	90
LBSM600143-39SS	3x14w	Surface	590	590	60
LBSM600243-39SS	3x24w	Surface	590	590	60
LBSM600283-78SS	3x28w	Surface	1190	590	60
LBSM600543-78SS	3x54w	Surface	1190	590	60
LBSM600144-52SS	4x14w	Surface	590	590	60
LBSM600244-52SS	4x24w	Surface	590	590	60
LBSM600284-96SS	4x28w	Surface	1190	590	60
LBSM600544-96SS	4x54w	Surface	1190	590	60




### Notes:

- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.
- Suspended Substitute "SUS" for "SM" in Cat No:

### Dimensional Detail

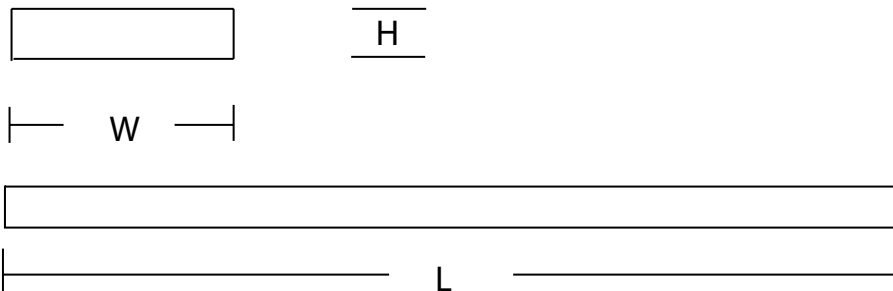

### Louvre Configurations

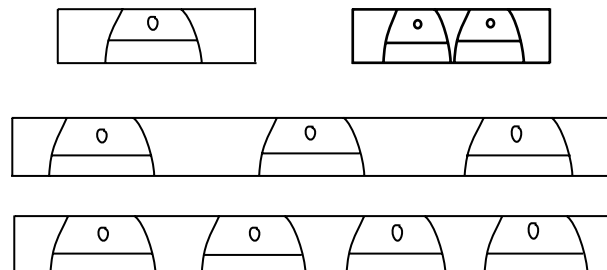

Note: Details subject to change without notice  
Please contact Australume sales for further information.