

# Low Brightness Recessed T5

# T5

## Low Brightness Troffers

A low-profile, louvred luminaire for recessed and surface applications.

It features the 1500G3 material in its louvre construction and a white polyester powder-coated body.

T5 lamp sources and electronic control gear are utilised for optimum performance.

All recessed luminaires include a 1.5m flex and 3-pin flat earth plug as standard.



## Applications


- Schools
- Offices
- Hospitals
- Libraries
- Retail

## Mounting

- T-Bar Recessed
- Plaster Recessed
- Surface Mounted
- Suspended

## Options

- Air Slots (TBar)
- Dimmable Ballasts

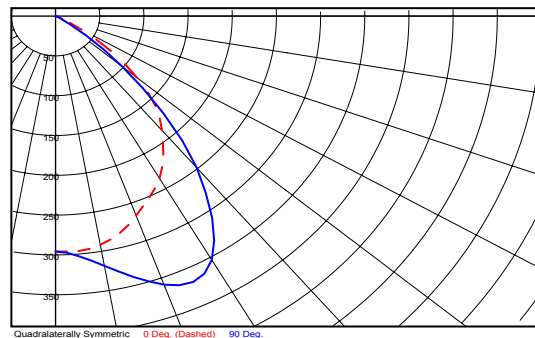

LBGT300282-565S 2x28wT5 Semi Specular  
Test Report LSA9171.

Note: Details subject to change without notice  
Please contact Australume sales for further information.



# Low Brightness Grid T5

# LBGT

## T-Bar 1500G3 Fixtures



Cat No	Wattage	Mounting	L	W	H
LBGT300142-26SS	2x14w	T-Bar	590	290	60
LBGT300242-26SS	2x24w	T-Bar	590	290	60
LBGT300282-56SS	2x28w	T-Bar	1190	290	60
LBGT300542-56SS	2x54w	T-Bar	1190	290	60




### Notes:

- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.
- Air Slots substitute "AT" for "GT" in Cat No.
- Other Louvre material types and configurations available upon request.

### Dimensional Detail



### Louvre Configurations

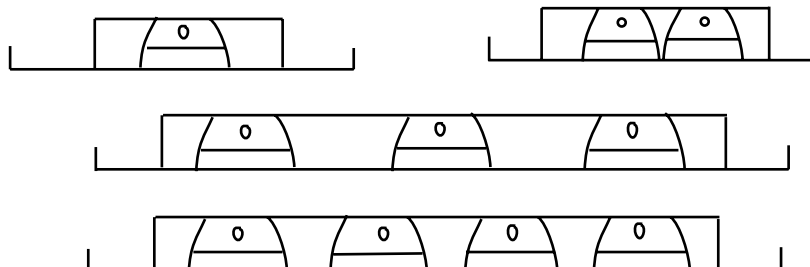

Note: Details subject to change without notice  
Please contact Australume sales for further information.



# Low Brightness Plaster T5

# LBPT

## Plaster 1500G3 Fixtures


Cat No	Wattage	Mounting	L	W	H
LBPT220142-26SS	2x14w	Plaster	590	220	90
LBPT220242-26SS	2x24w	Plaster	590	220	90
LBPT220282-56SS	2x28w	Plaster	1190	220	90
LBPT220542-56SS	2x54w	Plaster	1190	220	90




### Notes:

- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.

### Dimensional Detail

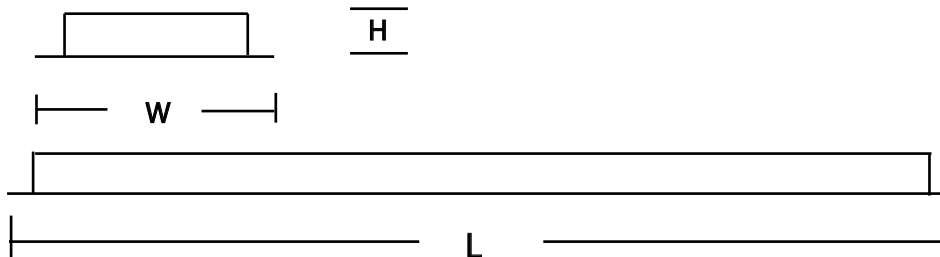

### Louvre Configurations

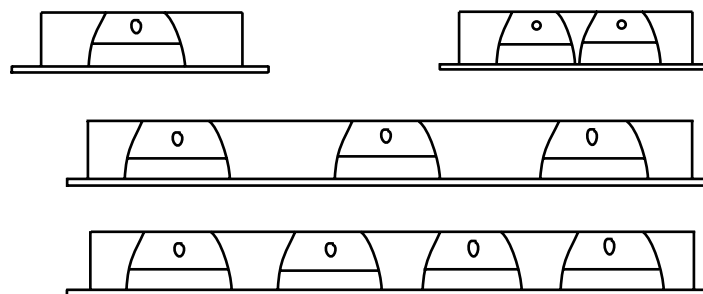

Note: Details subject to change without notice  
Please contact Australume sales for further information.



# Low Brightness Surface T5

# LBSM

## Surface 1500G3 Fixtures


Cat No	Wattage	Mounting	L	W	H
LBSM220142-26SS	2x14w	Surface	590	220	90
LBSM220242-26SS	2x24w	Surface	590	220	90
LBSM220282-56SS	2x28w	Surface	1190	220	90
LBSM220542-56SS	2x54w	Surface	1190	220	90




### Notes:

- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.
- Suspended Substitute "SUS" for "SM" in Cat No:

### Dimensional Detail

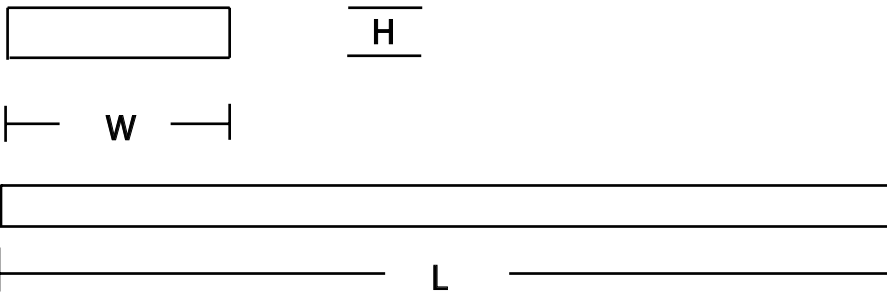

### Louvre Configurations

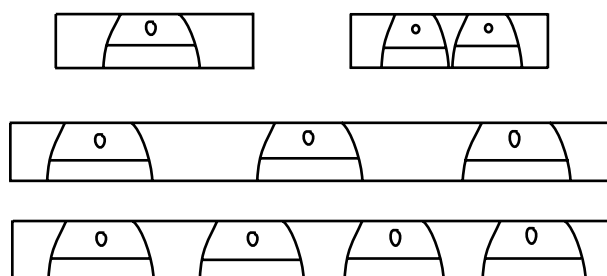

Note: Details subject to change without notice  
Please contact Australume sales for further information.

