

Air Handling T-Bar Troffer

A high quality spot welded and polyester powder coated light fitting for use with various Australian Standard air diffusers.

Available in a range of trim configurations to meet the needs of any project requirement.

Single, Twin and triple versions available of 18W and 36W T8.

Single and Twin versions available in T5.

All recessed luminaires include a 1.5m flex and 3-pin flat earth plug as standard.



Applications

- Multi Storey High Rise Towers
- Hospitals
- Libraries
- Retail

Mounting


- T-Bar Recessed

Options

- Chiller Beam
- Low Brightness Louvres
- Lay-in Lens
- Dimmable Ballasts
- Emergency Kit

Optics

- ULB Louvre
- Y12 prismatic
- Y15 prismatic
- Y19 prismatic
- Y19 silvertint prismatic
- Y5 Fine rib
- Y7 Course rib
- Refer OEM Pages for lens details.
- Other diffusers available upon request.

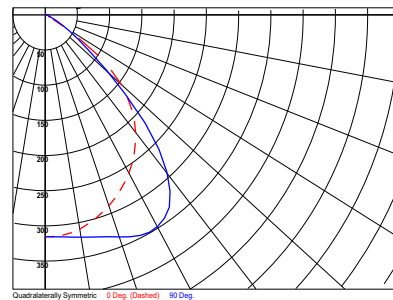

LBAT300371-13SS 1x37w T8 13 Cell Semi Specular
Test Report LSA10490.

Recessed Air Handling T8


AIR

Recessed Air Handling T8



Cat No	Wattage	Mounting	L	W	H
AIRT300181Y12	1x18w	T-Bar	590	290	100
AIRT300361Y12	1x36w	T-Bar	1190	290	100
AIRT300182Y12	2x18w	T-Bar	590	290	100
AIRT300362Y12	2x36w	T-Bar	1190	290	100
AIRT400182Y12	2x18w	T-Bar	590	390	100
AIRT400362Y12	2x36w	T-Bar	1190	390	100
AIRT400183Y12	3x18w	T-Bar	590	390	100
AIRT400363Y12	3x36w	T-Bar	1190	390	100
AIRT600182Y12	2x18w	T-Bar	590	590	100
AIRT600362Y12	2x36w	T-Bar	1190	590	100
AIRT600183Y12	3x18w	T-Bar	590	590	100
AIRT600363Y12	3x36w	T-Bar	1190	590	100

Notes:

- Electronic ballast add "EL" to Cat No. to T8
- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.
- Replace "Y12" suffix in Cat # with other lens types as required (See front page)
- Emergency add suffix "EM" to Cat No.

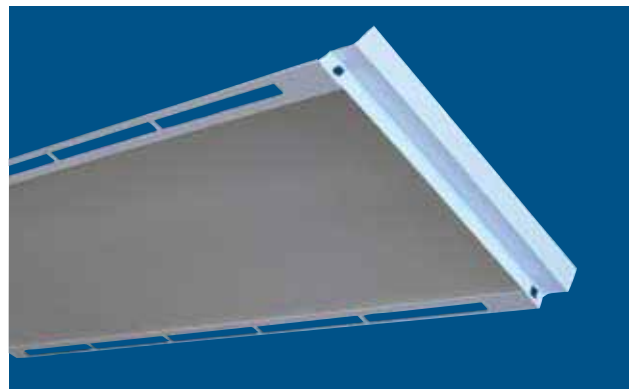

Dimensional Detail

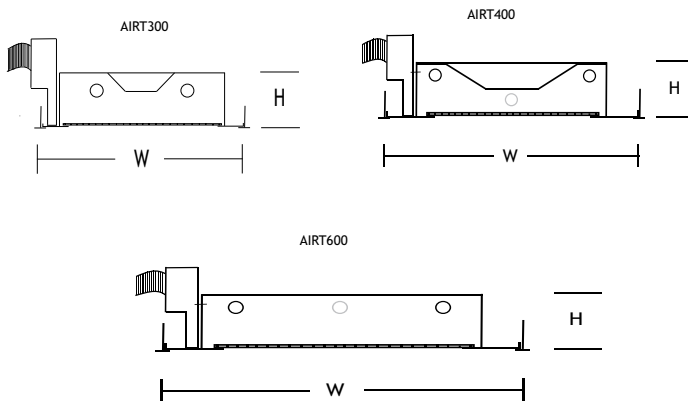

Note: Details subject to change without notice
Please contact Australume sales for further information.



Recessed Air Handling T5 ULB

Cat No	Wattage	Mounting	L	W	H
LBAT300141-13SS	1x14w	T-Bar	590	290	100
LBAT300241-13SS	1x24w	T-Bar	590	290	100
LBAT300281-24SS	1x28w	T-Bar	1190	290	100
LBAT300541-24SS	1x54w	T-Bar	1190	290	100
LBAT300142-26SS	2x14w	T-Bar	590	290	100
LBAT300242-26SS	2x24w	T-Bar	590	290	100
LBAT300282-52SS	2x28w	T-Bar	1190	290	100
LBAT300542-52SS	2x54w	T-Bar	1190	290	100
LBAT400141-13SS	1x14w	T-Bar	590	390	100
LBAT400241-13SS	1x24w	T-Bar	590	390	100
LBAT400281-24SS	1x28w	T-Bar	1190	390	100
LBAT400541-24SS	1x54w	T-Bar	1190	390	100
LBAT400142-26SS	2x14w	T-Bar	590	390	100
LBAT400242-26SS	2x24w	T-Bar	590	390	100
LBAT400282-52SS	2x28w	T-Bar	1190	390	100
LBAT400542-52SS	2x54w	T-Bar	1190	390	100




Notes:

- DSI Dimming add suffix “DSI” to Cat No.
- DALI Dimming add suffix “DALI” to Cat No.
- Emergency add suffix “EM” to Cat No.
- Low Profile version available upon request.

Other Grid Sizes Available

- 1350mm x 450mm
- 1500mm x 250mm Single
- 1500mm x 300mm
- 1500mm x 500mm

Dimensional Detail

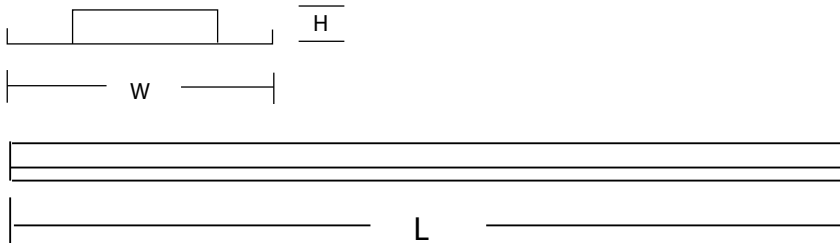

Louvre Configurations



Note: Details subject to change without notice
Please contact Australume sales for further information.



Recessed Air Handling T5


Cat No	Wattage	Mounting	L	W	H
AIRT300141Y12	1x14w	T-Bar	590	290	100
AIRT300241Y12	1x24w	T-Bar	590	290	100
AIRT300281Y12	1x28w	T-Bar	1190	290	100
AIRT300541Y12	1x54w	T-Bar	1190	290	100
AIRT300142Y12	2x14w	T-Bar	590	290	100
AIRT300242Y12	2x24w	T-Bar	590	290	100
AIRT300282Y12	2x28w	T-Bar	1190	290	100
AIRT300542Y12	2x54w	T-Bar	1190	290	100
AIRT400141Y12	1x14w	T-Bar	590	390	100
AIRT400241Y12	1x24w	T-Bar	590	390	100
AIRT400281Y12	1x28w	T-Bar	1190	390	100
AIRT400541Y12	1x54w	T-Bar	1190	390	100
AIRT400142Y12	2x14w	T-Bar	590	390	100
AIRT400242Y12	2x24w	T-Bar	590	390	100
AIRT400282Y12	2x28w	T-Bar	1190	390	100
AIRT400542Y12	2x54w	T-Bar	1190	390	100



Notes:

- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.
- Replace "Y12" suffix in Cat # with other lens types as required (See front page)
- Emergency add suffix "EM" to Cat No.
- Low Profile version available upon request.

Dimensional Detail

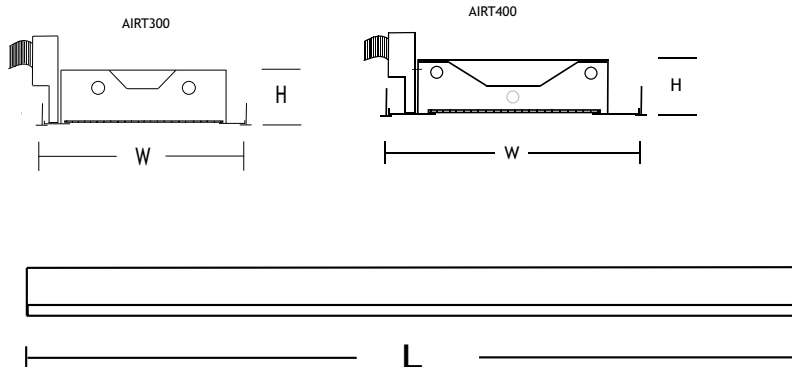

Note: Details subject to change without notice
Please contact Australume sales for further information.

Recessed Air Handling T8

AIR

High Performance T8



Cat No	Wattage	Mounting	L	W	H
LBAT300181-6SS	1x18w	T-Bar	590	290	95
LBAT300361-13SS	1x36w	T-Bar	1190	290	95

Notes:

- Electronic ballast add "EL" to Cat No.
- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.
- Emergency add suffix "EM" to Cat No.



Dimensional Detail



Note: Details subject to change without notice
Please contact Australume sales for further information.

