

Kitchen Plaster Troffer

The KPLAS is a high quality diffused & sealed troffer luminaire for recessed plaster applications where a fully sealed luminaire is needed to prevent contamination of the area below.

It features a white polyester powdercoated sheet-steel body and a wide range of diffusing medium.

It utilises T8 lamp sources and conventional gear as standard (electronic gear optional) and T5 lamp sources with electronic gear.

Recessed luminaires include a 1.5m supply flex and plug as standard



Applications

- Food Preparation
- Laboratories
- Hospitals
- Cleanrooms

Mounting


- Plaster Recessed

Options

- Electronic Ballasts
- Dimmable Ballasts

Optics

- Y12 prismatic
- Y15 prismatic
- Y19 prismatic
- Y19 silvertint prismatic
- Y5 Fine rib
- Y7 Course rib
- Clear polycarbonate
- Cast acrylic
- Refer OEM Pages for lens details.
- Other diffusers available upon request

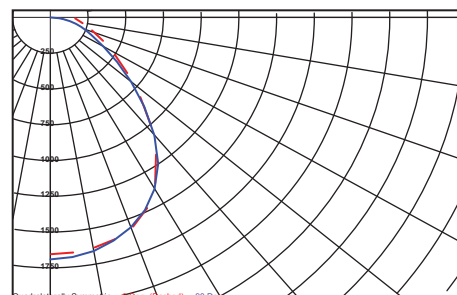

PLAS300362Y12 2x36w T8 Y12 Lens
Test Report AS1041

Kitchen Plaster

| Cat No | Wattage | Mounting | L | W | H |
|----------------|---------|----------|------|-----|-----|
| KPLAS300181Y12 | 1x18w | Plaster | 635 | 325 | 100 |
| KPLAS300361Y12 | 1x36w | Plaster | 1245 | 325 | 100 |
| KPLAS300182Y12 | 2x18w | Plaster | 635 | 325 | 100 |
| KPLAS300362Y12 | 2x36w | Plaster | 1245 | 325 | 100 |
| KPLAS300183Y12 | 3x18w | Plaster | 635 | 325 | 100 |
| KPLAS300363Y12 | 3x36w | Plaster | 1245 | 325 | 100 |




Notes:

- Electronic ballast add "EL" to Cat No.
- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.
- Replace "Y12" suffix in Cat # with other lens types as required (See front page)
- Emergency add suffix "EM" to Cat No.



Plaster Mounting Bracket

Dimensional Detail



Kitchen Plaster


| Cat No | Wattage | Mounting | L | W | H |
|----------------|---------|----------|------|-----|-----|
| KPLAS300141Y12 | 1x14w | Plaster | 635 | 325 | 100 |
| KPLAS300241Y12 | 1x24w | Plaster | 635 | 325 | 100 |
| KPLAS300281Y12 | 1x28w | Plaster | 1245 | 325 | 100 |
| KPLAS300541Y12 | 1x54w | Plaster | 1245 | 325 | 100 |
| KPLAS300142Y12 | 2x14w | Plaster | 635 | 325 | 100 |
| KPLAS300242Y12 | 2x24w | Plaster | 635 | 325 | 100 |
| KPLAS300282Y12 | 2x28w | Plaster | 1245 | 325 | 100 |
| KPLAS300542Y12 | 2x54w | Plaster | 1245 | 325 | 100 |



Notes:

- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.
- Replace "Y12" suffix in Cat # with other lens types as required (See front page)
- Emergency add suffix "EM" to Cat No.

Dimensional Detail

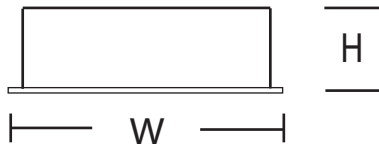

Plaster Mounting Bracket