

## Pelmet Batten

The Pelmalite series is designed specifically for pelmet coffer mounting applications.

Lampholders are offset & overlapping to give the appearance of continuous even light along the length of the pelmet.

It features a white polyester powdercoated steel body, through wiring and quick connect terminals for simple fast connection.




## Applications

- Shopping Centres
- Hospitals
- Schools
- Foyers
- Libraries
- Boardrooms

## Options

- Dimming ballasts
- Electronic ballasts
- Through wiring

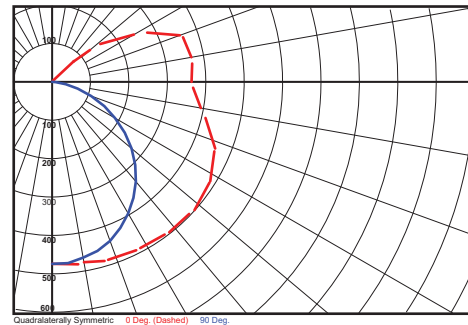

BATT075361 1x36w T8 Batten  
Test Report AS1062

## Pelmet Batten

Cat No	Wattage	Optic	A	B	C	D	E
PELM141	1x14w	Bare	578	60	30	49	58
PELM181	1x18w	Bare	620	88	42	45	82
PELM211	1x21w	Bare	878	60	30	49	58
PELM241	1x24w	Bare	578	60	30	49	58
PELM281	1x28w	Bare	1178	60	30	49	58
PELM361	1x36w	Bare	1230	88	42	45	82
PELM391	1x39w	Bare	878	60	30	49	58
PELM541	1x54w	Bare	1178	60	30	49	58
PELM581	1x58w	Bare	1535	88	42	45	82




Optional End Cover

### Notes:

- Optional End Cover Cat No: PELMEC (Order Separately)
- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.
- Twin lamp versions available upon request.

### Dimensional Detail

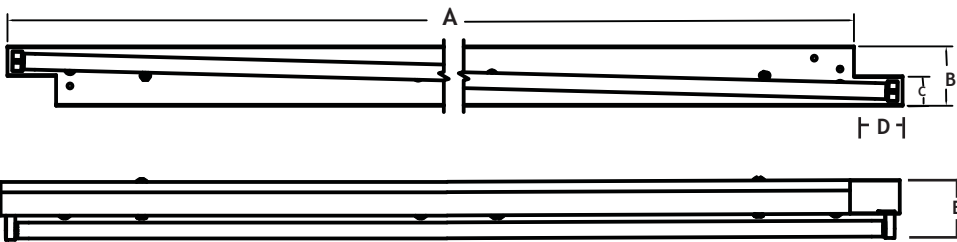

### Dimension Example

To calculate run lengths add the A dimension for each fitting in the run plus the D dimension added for the last fitting in the run.

ie: 2 x PELM281 (1178mm each) + 1 x PELM211 (878mm each) + 49mm = 1 Run of 3283mm

