

## Pelmet Batten

The Pelmalite series is designed specifically for pelmet coffer mounting applications.

Lampholders are offset & overlapping to give the appearance of continuous even light along the length of the pelmet.

It features a white polyester powdercoated steel body , through wiring and quick connect terminals for simple fast connection.

Available in single T5 and single T8 lamp sources.




## Applications

- Shopping Centres
- Hospitals
- Schools
- Foyers
- Libraries
- Boardrooms
- Domestic

## Options

- Dimming ballasts
- Electronic ballasts
- Through wiring

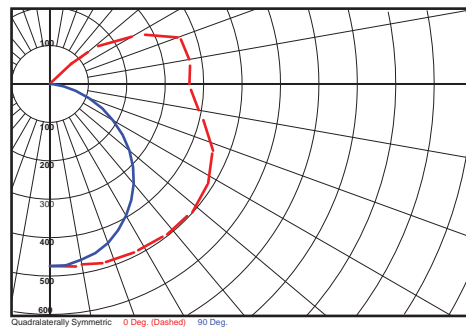

BATT075361 1x36w T8 Batten  
Test Report AS1062

## Pelmet Batten

Cat No	Wattage	Optic	A	B	C	D	E
PELM141	1x14w T5	Bare	530	60	30	48	58
PELM181	1x18w T8	Bare	590	88	42	42	82
PELM211	1x21w T5	Bare	830	60	30	48	58
PELM241	1x24w T5	Bare	530	60	30	48	58
PELM281	1x28w T5	Bare	1130	60	30	48	58
PELM351	1x35w T5	Bare	1430	88	42	42	82
PELM361	1x36w T8	Bare	1190	88	42	42	82
PELM391	1x39w T5	Bare	830	60	30	48	58
PELM491	1x49w T5	Bare	1430	60	30	48	58
PELM541	1x54w T5	Bare	1130	60	30	48	58




Optional End Cover

### Notes:

- Optional End Cover Cat No: PELMEC (Order Separately)
- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.


### Dimensional Detail

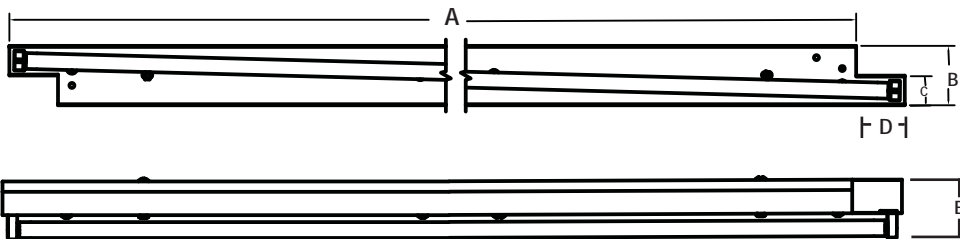

### Dimension Example

To calculate run lengths add the A dimension for each fitting in the run plus the D dimension added for the last fitting in the run.

ie: 2 x PELM281 (1130mm each) + 1 x PELM211 (830mm each) + 49mm = 1 Run of 3139mm



Note: Details subject to change without notice  
Please contact Australume sales for further information.