

Weatherproof

An adverse location light fitting with IP65 rating, suitable for use in high humidity, damp, dust and corrosive environments.


G.R.P. grey body, clear polycarbonate lens with internal prisms, stainless steel lockable (vandal resistant) toggle clips and flow formed in situ polyurethane gasket. The gear tray is white powder zinc sealed steel, with retaining provision for ease of maintenance and safety.

Available in single or twin version of both T5 and T8 lamp sources.




Applications

- Schools
- Hospitals
- Canopies
- Abattoirs
- Retail
- Carparks
- Stairwells
- Gymnasiums
- Store Rooms

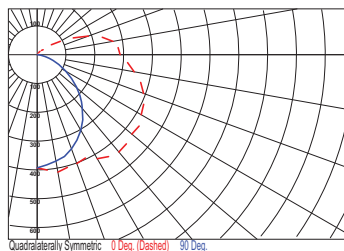

WPP115361 1x36wT8
Report AS1105

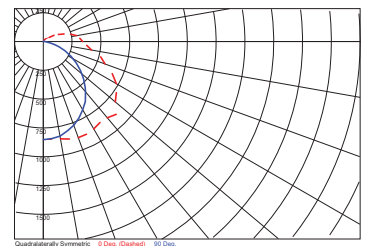

WPP180362 2x36wT8
Report AS1106

Options


- T5 Electronic Gear
- T8 Conventional Gear
- Dimming ballasts
- Emergency

Weatherproof

Cat No	Wattage	Optic	A	B	C	D
WPP115141	1x14w	Polycarbonate	666	230	100	108
WPP115181	1x18w	Polycarbonate	666	230	100	108
WPP115241	1x24w	Polycarbonate	666	230	100	108
WPP115281	1x28w	Polycarbonate	1276	836	100	108
WPP115361	1x36w	Polycarbonate	1276	836	100	108
WPP115541	1x54w	Polycarbonate	1276	836	100	108
WPP115581	1x58w	Polycarbonate	1576	1136	100	108
WPP180142	2x14w	Polycarbonate	666	230	170	108
WPP180182	2x18w	Polycarbonate	666	230	170	108
WPP180242	2x24w	Polycarbonate	666	230	170	108
WPP180282	2x28w	Polycarbonate	1276	836	170	108
WPP180362	2x36w	Polycarbonate	1276	836	170	108
WPP180542	2x54w	Polycarbonate	1276	836	170	108
WPP180582	2x58w	Polycarbonate	1576	1136	170	108



Dimensional Details

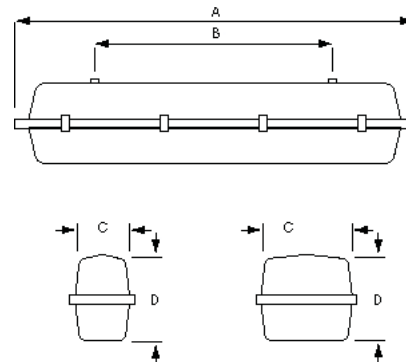

Notes:

- For Acrylic Diffuser change prefix "WPP" to "WPA"
- Electronic Ballast in T8 fittings add "EL" to Cat No.
- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.
- Maintained Emergency add "EM" to Cat No.



Stainless steel lockable (vandal resistant) toggle clips.