

A-Wing

The AWing is a low brightness louvred luminaire for recessed applications.

The feature of this fitting is its Wing Back reflector which provides soft lighting high on office walls.

This design achieves significant visual comfort due a reduction in harsh high contrasts.

All recessed luminaires include a 1.5m supply flex and plug as standard



Applications

- Offices
- Schools
- Hospitals
- Foyers
- Reception areas
- Retail

Mounting


- Plaster recessed.
- T-Bar recessed.
- Air Slots

Options

- Electronic Ballasts
- Dimmable Ballasts
- Air Slots

Optics

- Back Softlight reflector with low brightness louvre.

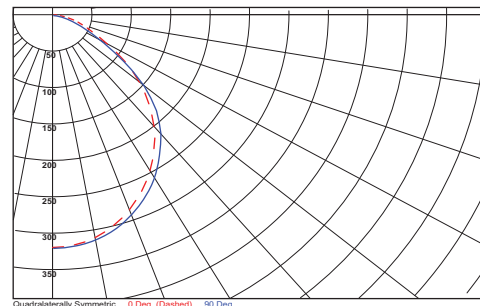

AW400541-28SS Y5FRR Overlay A-Wing
Test Report LL10473

A-Wing T5

AW

A-Wing



Cat No	Wattage	Mounting	L	W	H
AW400141T	1x14w	T-Bar	590	395	100
AW400241T	1x24w	T-Bar	590	395	100
AW400281T	1x28w	T-Bar	1190	395	100
AW400541T	1x54w	T-Bar	590	395	100
AW400142T	2x14w	T-Bar	590	395	100
AW400242T	2x24w	T-Bar	590	395	100
AW400282T	2x28w	T-Bar	1190	395	100
AW600141T	1x14w	T-Bar	590	595	100
AW600241T	1x24w	T-Bar	590	595	100
AW600281T	1x28w	T-Bar	1190	595	100
AW600541T	1x54w	T-Bar	1190	595	100
AW600142T	2x14w	T-Bar	590	595	100
AW600242T	2x24w	T-Bar	590	595	100
AW600282T	2x28w	T-Bar	1190	595	100

Notes:

- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.
- Optional Plaster Frame add "PF" to cat No.
- No Air Slots add "NA" to cat No.



Dimensional Detail



Note: Details subject to change without notice
Please contact Australume sales for further information.

