


Direct

The Directlight has been designed for lower wattage T5 lamps to conform to BCA requirements in confined secured areas of a building ie: Corridors , lavatories and amenities.

All recessed luminaires include a 1.5m supply flex and plug as standard.

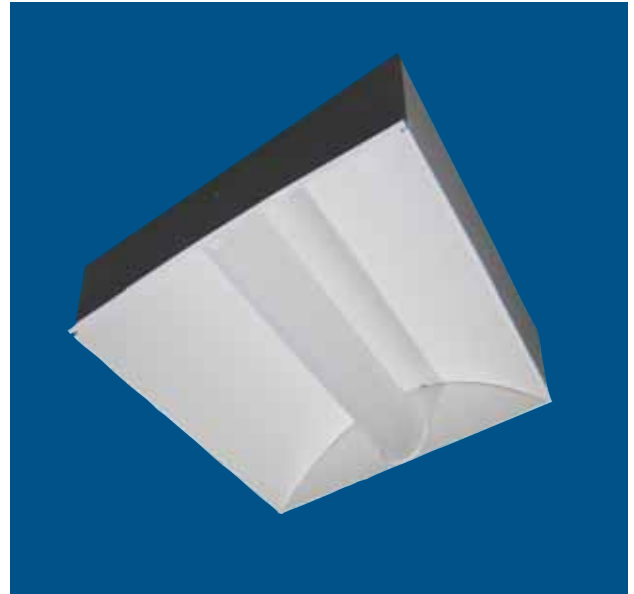

Applications

- Offices
- Secured areas
- Hospitals

Mounting


- T-Bar Recessed
- Plaster Recessed (optional frame)

Options

- Electronic Ballasts
- Dimmable Ballasts
- Plaster Frame

Optics

- Back Softlight reflector with Y5 diffuser.

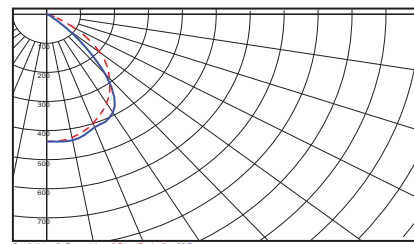

DIR600141 1x14w T5 Directlight
Test Report LL11372

Direct T5


DIR

Direct

Cat No	Wattage	Mounting	L	W	H
DIR600141T	1x14w	T-Bar	590	595	108
DIR600241T	1x24w	T-Bar	590	595	108

Notes:

- DSI Dimming add suffix "DSI" to Cat No.
- DALI Dimming add suffix "DALI" to Cat No.
- Optional Plaster Frame add "PF" to Cat No.

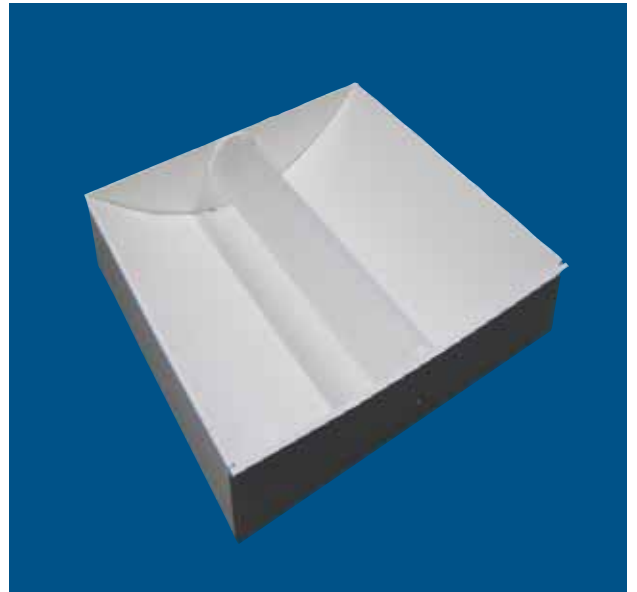

Dimensional Detail

