



AQUARIUS

AQUARIUS is a robust IP65 product designed and engineered for adverse locations.



It features a glass reinforced polyester (GRP) body & patterned polycarbonate diffuser for vandal resistance and efficient distribution.

Key features include a polyurethane injected foam gasket to ensure IP65 rating, IK07 impact rating, white powder coated reflector gear tray with lanyards and stainless steel hinging diffuser clips. AQUARIUS is available in narrow or wide body, and is wired complete with electronic (A2) ballast and T5 colour 840 triphosphor lamps.



Technical information

Polar Distribution Curve

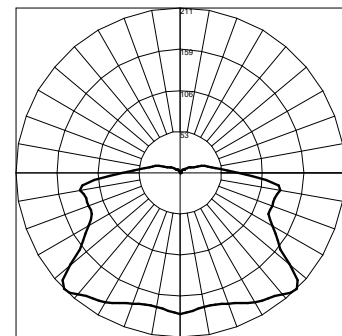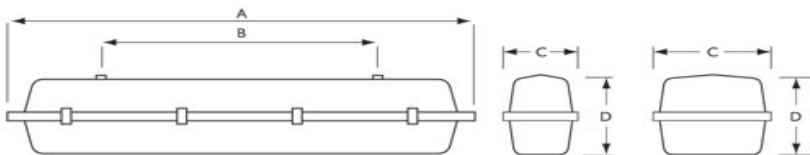

AQ-W-228

| Product Code | Wattage | Mounting | Body Option | Nominal Dim. (mm) | | | Mounting Centres (mm) |
|--------------|----------|----------|-------------|-------------------|-----|-----|-----------------------|
| | | | | A | C | D | B |
| AQ-N-114 | 1x14w T5 | Surface | Narrow | 666 | 100 | 108 | 230 |
| AQ-N-214 | 2x14w T5 | Surface | Narrow | 666 | 100 | 108 | 230 |
| AQ-N-124 | 1x24w T5 | Surface | Narrow | 666 | 100 | 108 | 230 |
| AQ-N-224 | 2x24w T5 | Surface | Narrow | 666 | 100 | 108 | 230 |
| AQ-N-128 | 1x28w T5 | Surface | Narrow | 1276 | 100 | 108 | 836 |
| AQ-N-228 | 2x28w T5 | Surface | Narrow | 1276 | 100 | 108 | 836 |
| AQ-N-135 | 1x35w T5 | Surface | Narrow | 1576 | 100 | 108 | 1136 |
| AQ-N-235 | 2x35w T5 | Surface | Narrow | 1576 | 100 | 108 | 1136 |
| AQ-N-154 | 1x54w T5 | Surface | Narrow | 1276 | 100 | 108 | 836 |
| AQ-N-254 | 2x54w T5 | Surface | Narrow | 1276 | 100 | 108 | 836 |
| AQ-W-114 | 1x14w T5 | Surface | Wide | 666 | 170 | 108 | 230 |
| AQ-W-214 | 2x14w T5 | Surface | Wide | 666 | 170 | 108 | 230 |
| AQ-W-124 | 1x24w T5 | Surface | Wide | 666 | 170 | 108 | 230 |
| AQ-W-224 | 2x24w T5 | Surface | Wide | 666 | 170 | 108 | 230 |
| AQ-W-128 | 1x28w T5 | Surface | Wide | 1276 | 170 | 108 | 836 |
| AQ-W-228 | 2x28w T5 | Surface | Wide | 1276 | 170 | 108 | 836 |
| AQ-W-135 | 1x35w T5 | Surface | Wide | 1576 | 170 | 108 | 1136 |
| AQ-W-235 | 2x35w T5 | Surface | Wide | 1576 | 170 | 108 | 1136 |
| AQ-W-154 | 1x54w T5 | Surface | Wide | 1276 | 170 | 108 | 836 |
| AQ-W-254 | 2x54w T5 | Surface | Wide | 1276 | 170 | 108 | 836 |

Wiring Options

Code

| | |
|------------------------------------|------|
| DSI digital dimming ballast | -D1 |
| DALI Eco digital dimming ballast | -D2 |
| DALI Excel digital dimming ballast | -D3 |
| 1-10V Analogue dimming ballast | -D4 |
| Emergency Single Point pack | -EM |
| Fused terminal block | -FTB |
| Colour 830 Triphosphor Lamp | -3K |