



## CUCINA PLASTER

CUCINA PLASTER is commonly used for general kitchen areas where minimal seal is required.

It incorporates a screw fixed frame lined with an open cell foam gasket which encapsulates an inverted prismatic L12 lens for ease of maintenance.


Solidly manufactured and powder coated to a high gloss white finish, CUCINA PLASTER is wired complete with electronic (A2) ballast, colour 840 triphosphor lamps, 1.5m 3 core, 3 pin flex and plug and plaster mounting brackets.



### Technical information

### Polar Distribution Curve

Product Code	Wattage	Mounting	Lens	Nominal Dim. (mm)			Cutout Dim. (mm)
				L	W	D	
CC-P-114	1x14w T5	Recessed Plaster	L12	635	325	100	615 x 310
CC-P-214	2x14w T5	Recessed Plaster	L12	635	325	100	615 x 310
CC-P-314	3x14w T5	Recessed Plaster	L12	620	620	100	605 x 605
CC-P-414	4x14w T5	Recessed Plaster	L12	620	620	100	605 x 605
CC-P-124	1x24w T5	Recessed Plaster	L12	635	325	100	615 x 310
CC-P-224	2x24w T5	Recessed Plaster	L12	635	325	100	615 x 310
CC-P-324	3x24w T5	Recessed Plaster	L12	620	620	100	605 x 605
CC-P-424	4x24w T5	Recessed Plaster	L12	620	620	100	605 x 605
CC-P-128	1x28w T5	Recessed Plaster	L12	1245	325	100	1225 x 310
CC-P-228	2x28w T5	Recessed Plaster	L12	1245	325	100	1225 x 310
CC-P-135	1x35w T5	Recessed Plaster	L12	1545	325	100	1525 x 310
CC-P-235	2x35w T5	Recessed Plaster	L12	1545	325	100	1525 x 310
CC-P-154	1x54w T5	Recessed Plaster	L12	1245	325	100	1225 x 310
CC-P-254	2x54w T5	Recessed Plaster	L12	1245	325	100	1225 x 310

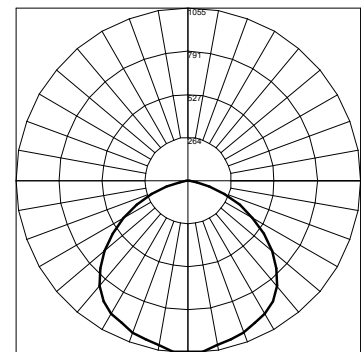

CC-P-228

### Wiring Options

### Code

DSI digital dimming ballast	-D1
DALIEco digital dimming ballast	-D2
DALI Excel digital dimming ballast	-D3
1-10V Analogue dimming ballast	-D4
Emergency Single Point pack	-EM
Fused terminal block	-FTB
Colour 830 Triphosphor Lamp	-3K

### Lens Options

### Code

L19 Prismatic Lens	-L19
L5 Fine Ribbed Opal Lens	-L5
L7 Coarse Ribbed Opal Lens	-L7