



# CUCINA GRID LED

CUCINA GRID LED is commonly used for general kitchen areas where minimal seal is required.

The CUCINA GRID features a microprism LED lens set in a secured frame with closed cell sealing gasket and white countersunk screws.

LED boards are 4000K CRI80 as standard while the 3000K CRI80 boards are an option. The fitting is wired with a 1.5metre flex and plug

The CUCINA GRID metal body is powder coated to a durable white finish.

Other options available are custom sizes, lumen packages, colour temperatures and dimming controls to suit a tailored solution package.



## Technical information

### Features

- Robust construction metal powder coated IP44 from below and IP20 from behind
- Wipe down inverted microprism led diffuser panel set in metal frame
- High efficiency and long-life LED light source with matching control gear
- Typical LED life L90 / B10 > 60,000 hours
- Typical luminaire efficiency of 125LPW
- Standard Correlated Colour Temperature 4000K CRI80
- 5 year warranty T&C's apply

### Options

Wireless Bluetooth	-BT
DALI, DSI and SwitchDim	-D
Emergency Maintained Single Point	-EM
Emergency Maintained DALI Interface	-DEM
600x600mm	-6
3000K CRI80	-3K


### Code

### Applications

- Hospitality
- Hospitals
- Aged care



## Polar Distribution Curve

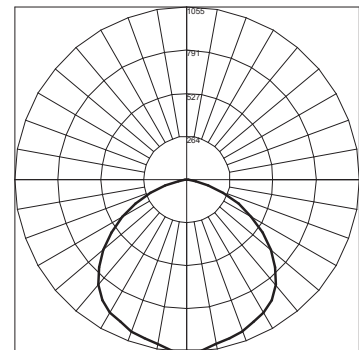

CC-G-66004L

Product Code	Delivered Lumens	Wattage	Lm/W	Mounting	Nominal Dim. (mm)		
					L	W	D
CC-G-33002L	2500	21	119	Recessed Grid	590	290	100
CC-G-34004L	2600	21	124	Recessed Grid	1190	290	100
CC-G-41004L	3100	25	124	Recessed Grid	1190	290	100
CC-G-58004L	4350	34	127	Recessed Grid	1190	290	100
CC-G-66004L	5000	40	125	Recessed Grid	1190	290	100
CC-G-66004L-6	5000	40	125	Recessed Grid	590	590	100

Custom Lumen packages and sizes are available on request.